VISIT…

TDA7490

25W + 25W STEREO CLASS-D AMPLIFIER 50W MONO IN BTL

- 25W + 25W OUTPUT POWER: R_L = 8Ω/4Ω; THD = 10%
- HIGH EFFICIENCY
- WIDE SUPPLY VOLTAGE RANGE (FROM ±10 TO ±25V)
- SPLIT SUPPLY
- TURN OFF/ON POP FREE
- ST-BY AND MUTE FEATURES
- SHORT CIRCUIT PROTECTION ACROSS THE LOAD
- THERMAL OVERLOAD PROTECTION
- EXTERNALLY SINCHRONIZABLE
- BRIDGE CONFIGURATION



Flexiwatt 25

ORDERING NUMBER: TDA7490

DESCRIPTION

The TDA7490 is a dual audio class D amplifier assembled in Flexiwatt 25 package; it is specially designed for high efficiency application mainly for TV and Home Stereo sets.

Figure 1. Test and application circuit. (Stereo Configuration)

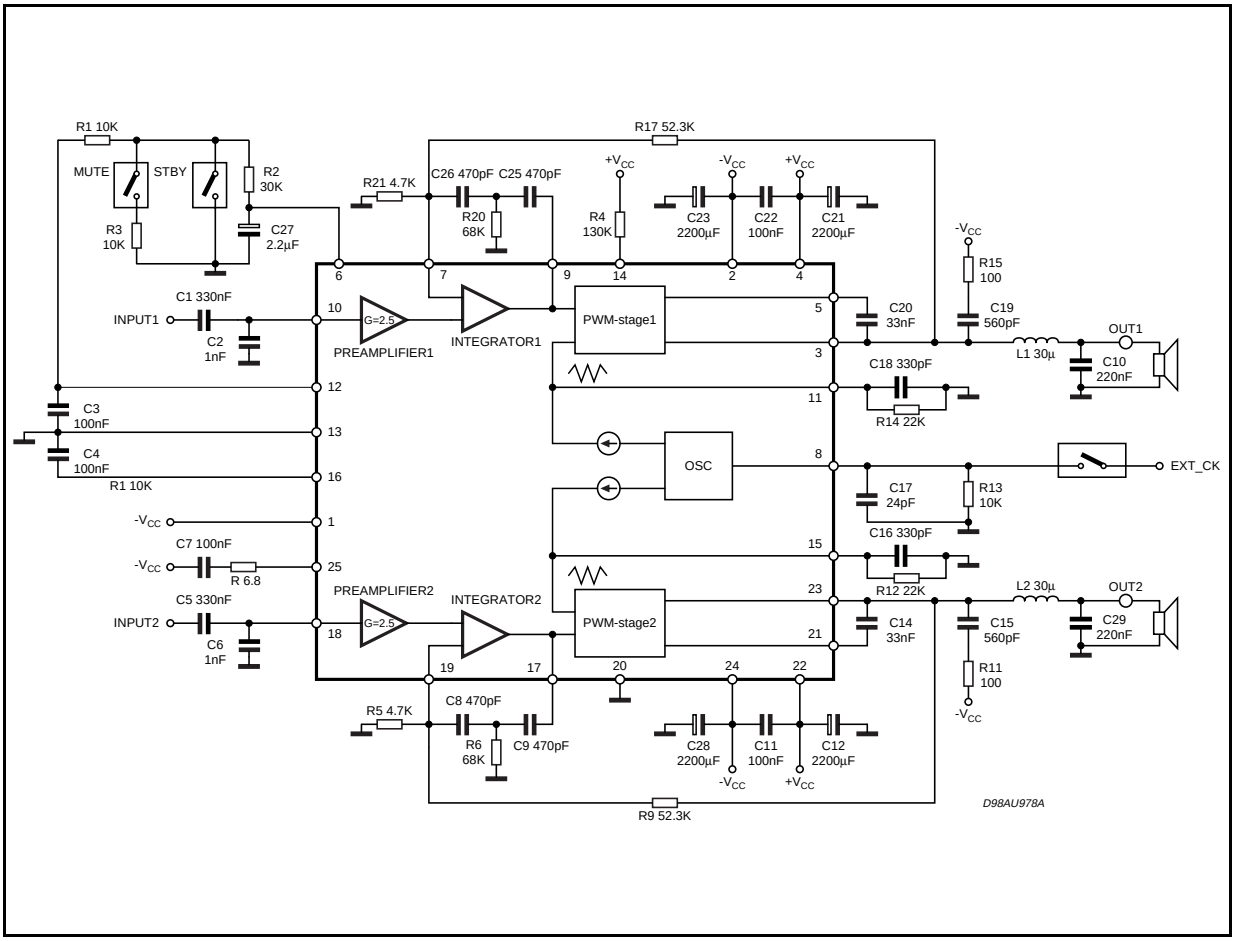

Figure 2. Test and application circuit. (Bridge Configuration)

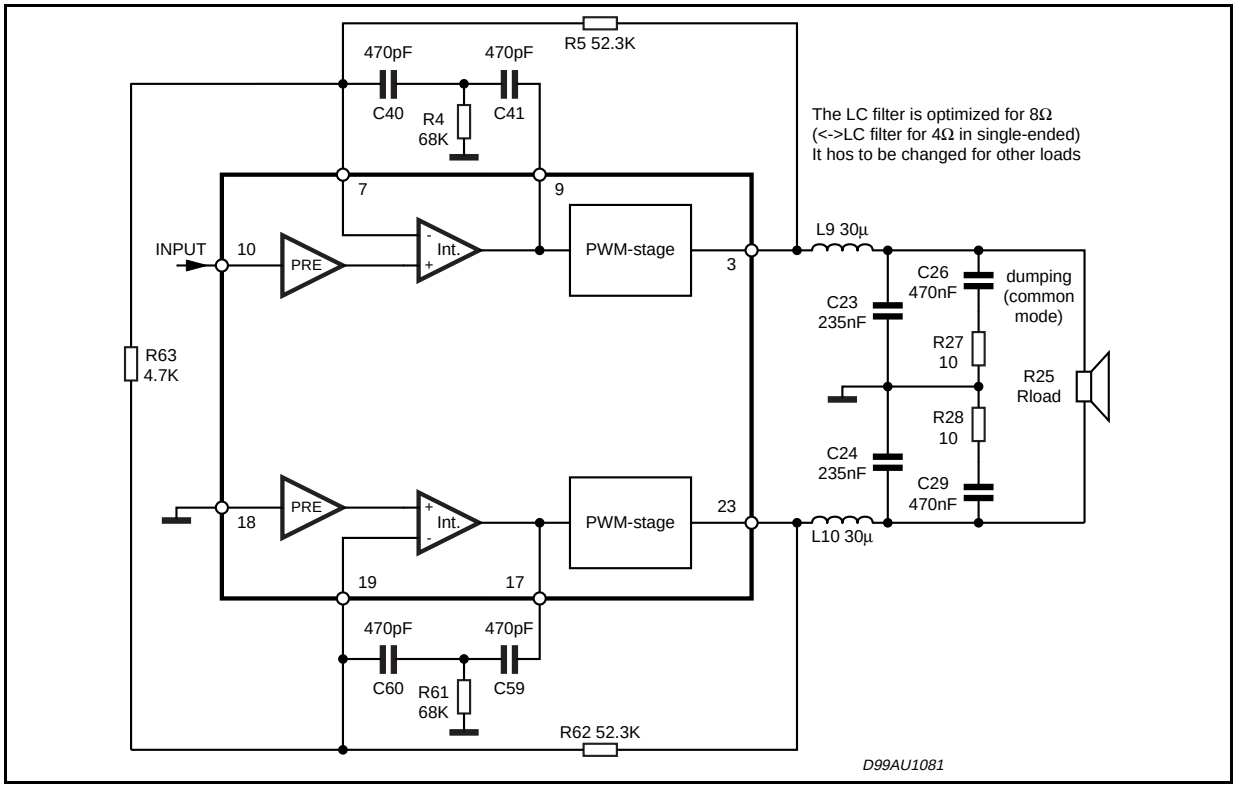

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	DC Supply Voltage (no signal)	±30	V
P_{tot}	Power Dissipation T_{case} = 70°C	35	W
T_{stg}, T_j	Storage and Junction Temperature	–40 to 150	°C
T_{op}	Operating Temperature Range	0 to 70	°C
$V_{6,8,10,18}$	Maximum Voltage on pins # 6,8,10,18 referred to GND	±5	V

THERMAL DATA

Symbol	Parameter	Typ.	Max.	Unit
$R_{th\ j\text{-}case}$	Thermal Resistance Junction-case	1		°C/W

PIN CONNECTION (Top view)

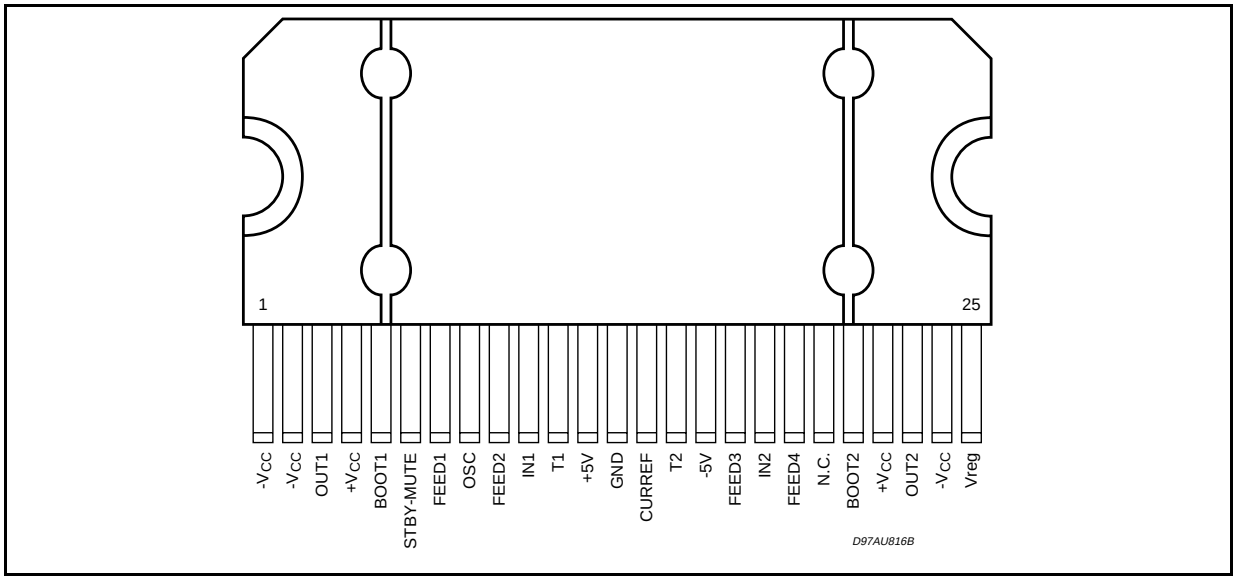

PIN FUNCTIONS

N.	Name	Function
1	$-V_{CC\ sign/sub}$	Negative signal/substrate supply
2	$-V_{CCpow1}$	Negative power supply CH1
3	out 1	PWM output of CH1
4	$+V_{CCpow1}$	Positive power supply CH1
5	BOOT1	Bootstrap CH1
6	STBY-MUTE	Control State Pin
7	FEED1	Feedback pin 1 CH1
8	OSC	Master Oscillator Setting Freequency Pin (or external sync.)
9	FEED2	Feedback pin2 CH1
10	IN1	Input CH1
11	T1	Triangular waveform CH1
12	+5V	+5V regulator (only for internal purposes)
13	GND	Signal ground
14	CURREF	Setting current resistor
15	T2	Triangular waveform CH2
16	-5V	-5V regulator (only for internal purposes)
17	FEED3	Feedback pin1 CH2
18	IN2	Input CH2
19	FEED4	Feedback pin2 CH2
20	NC	Not connected
21	BOOT2	Bootstrap CH2
22	$+V_{CCpow2}$	Positive power supply CH2
23	OUT2	PWM output of CH2
24	$-V_{CCpow2}$	Negative power supply CH2
25	V_{reg}	10V regulator

ELECTRICAL CHARACTERISTICS (Refer to the test circuit, V_{CC} = ±21V; RL = 8Ω; Demod. filter L = 30mH, C = 220nF; f = 1KHz; fsw = 200kHz; Tamb = 25°C unless otherwise specified.)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V_S	Supply Range		±10		±25	V
I_q	Total Quiescent Current	$R_L = \infty$ no LC filter		70	120	mA
V_{OS}	Output Offset Voltage		–150		+150	mV
P_O	Output Power	THD = 10% THD = 1%	20 15	25 18		W W
$P_{O(BTL)}$	Output Power in Bridge Configuration	Vs =±22V; R_L = 16Ω THD = 10% THD = 1%		 50 40		 W W
		Vs =±17V; R_L = 8Ω THD = 10% THD = 1%		 50 40		 W W
P_O (1)	Output Power	R_L = 4Ω V_{CC} = ±16V THD = 10% THD = 1%		 25 18		 W W
P_D	Maximum Dissipated Power	V_{CC} = ±21V; R_L = 8Ω P_O = 25W + 25W; THD = 10%		6		W
η (2)	Efficiency (*)	P_O = 25W + 25W	80	89		%
THD	Total Harmonic Distortion	R_L = 8Ω; P_O = 1W		0.1		%
I_{max}	Overcurrent Protection Threshold	R_L = 0	3.5	5		A
T_j	Thermal Shut-down Junction Temperature			150		°C
G_V	Closed Loop Gain		29	30	31	dB
ΔG_V (3)	Gain Matching		-1		+1	dB
e_N	Total Input Noise R_G = 50Ω	A Curve f = 20Hz to 22KHz		7 12		μV μV
C_T	Cross talk	f = 1KHz, P_O = 1W		55		dB
R_i	Input Resistance		20	30		kΩ
SVR	Supply Voltage Rejection	f = 100Hz; V_r = 0.5		60		dB
V_{rmax}	Overvoltage Threshold (5)			55	60	V
T_r, T_f	Rising and Falling Time			50	70	ns
R_{DSON}	Power Transistor on Resistance			0.4	8	Ω
F_{SW} (4)	Switching Frequency Range		100	200	230	KHz
MUTE & STAND-BY FUNCTIONS						
V_{ST-BY}	Stand-by range		0		0.7	V
V_{MUTE}	Mute Range		1.7		2.5	V
V_{PLAY}	Play Range		4		5	V
A_{MUTE}	Mute Attenuation		55	60		dB
I_{qST-BY}	Quiescent Current @ Stand-by			3	5	mA

*: P_O = measured across the load using the following inductor:
COIL58120 MPPA 2 (magnectics) TURNS = 20 ø 1mm

(1) L = 15μH, C = 470nF

(2) η_{Top} = 90% where V_{CC} = ±25V; R_L = 8Ω; P_O = 43W + 43W; THD = 20%

(3) ΔGv is intended with R2, R17, R5, R9 1% precision

(4) $F_{SW} = 0.25 \cdot (1/(300ns + R13 \cdot (C17 + 76pF) \cdot 0.85)$

(5) $V_{RMAX} = (+V_{CC}) - (-V_{CC})$ when $V_R \geq V_{RMAX}$ the device goes in Stand-By mode

Figure 3. P.C. Board and component layout of the Figs. 1, 2.
(for Stereo and Bridge compatible configuration)

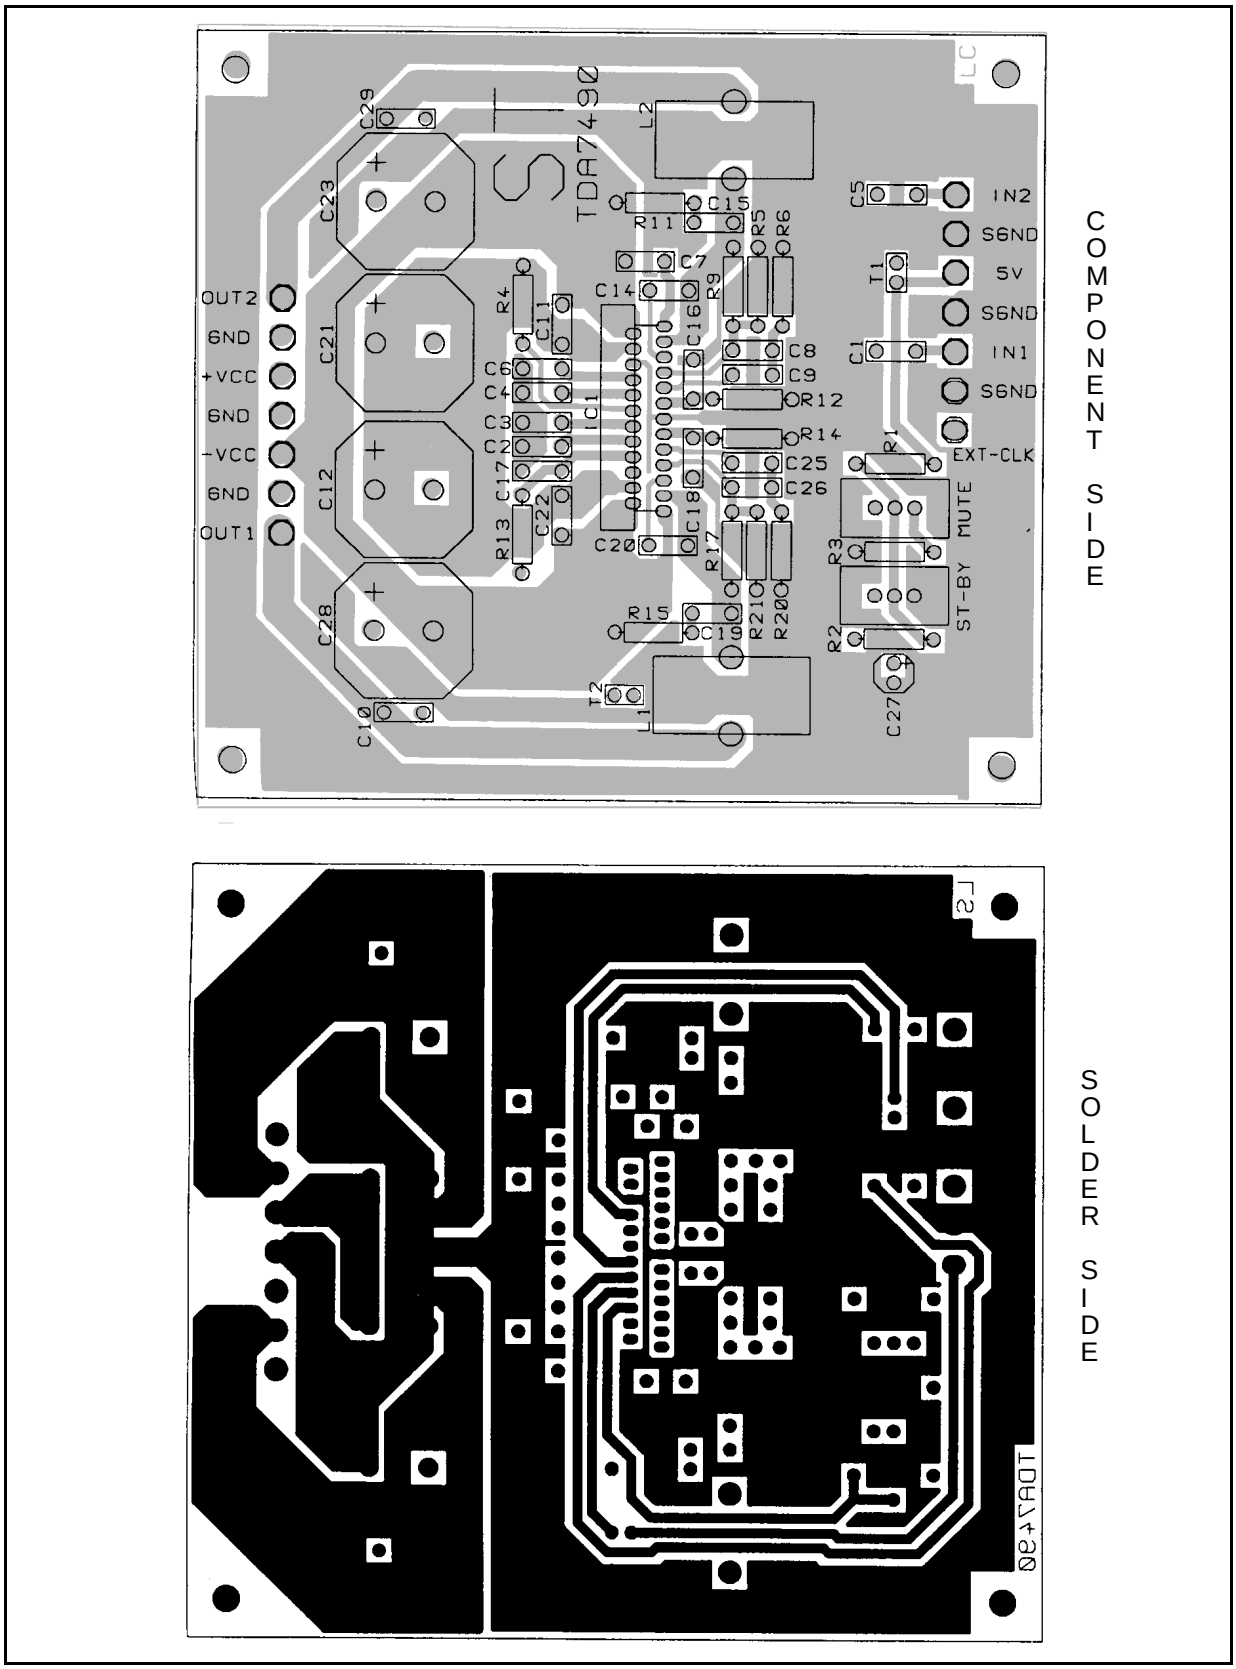

Figure 4. Distortion vs. Output Power

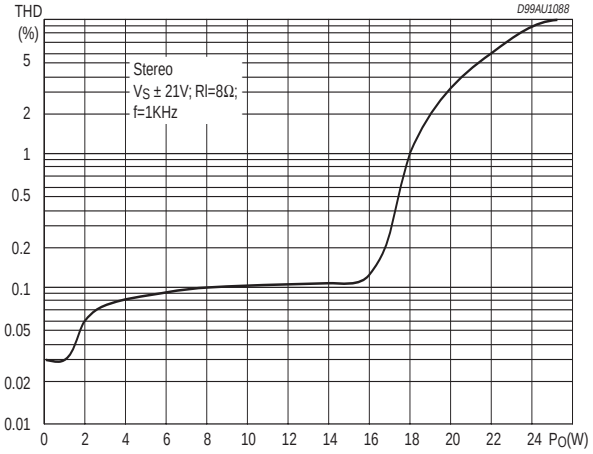

Figure 5. Distortion vs. Output Power

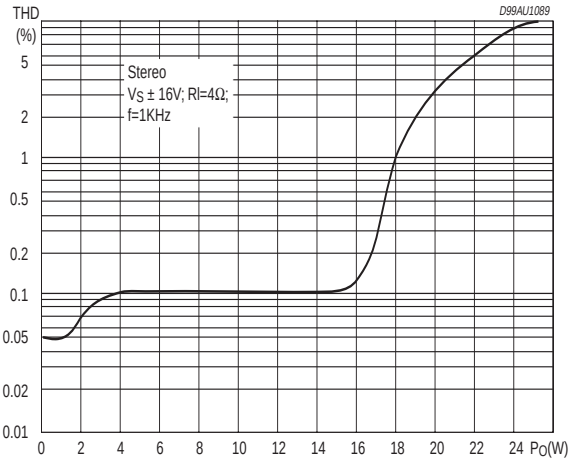

Figure 6. Crosstalk vs. Frequency

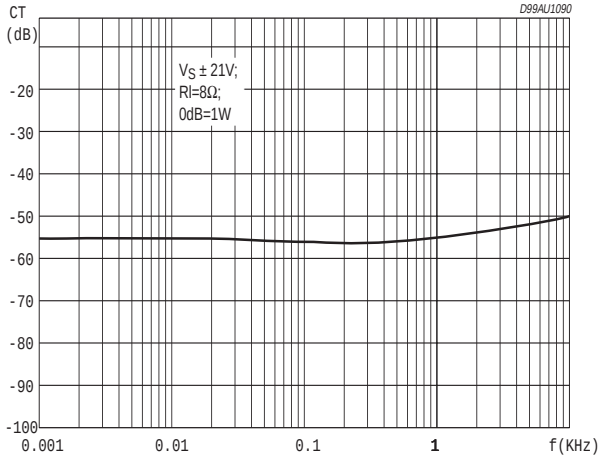

Figure 7. Frequency Response

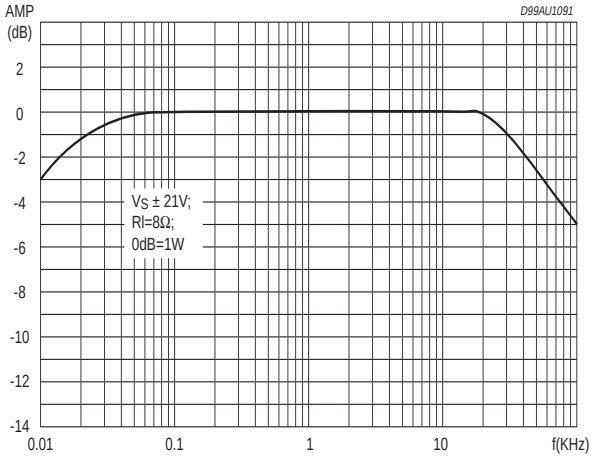

Figure 8. Power Dissipation vs. Output Power

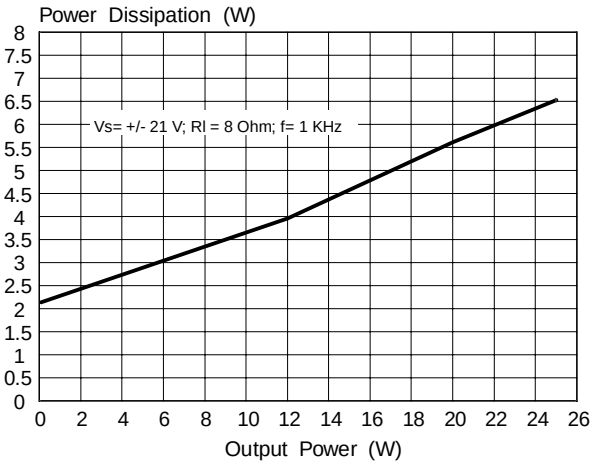

Figure 9. Distortion vs Output Power in BTL

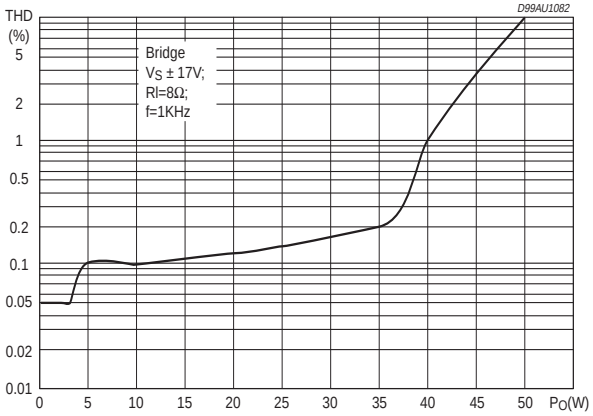

Figure 10. Distortion vs Output Power in BTL

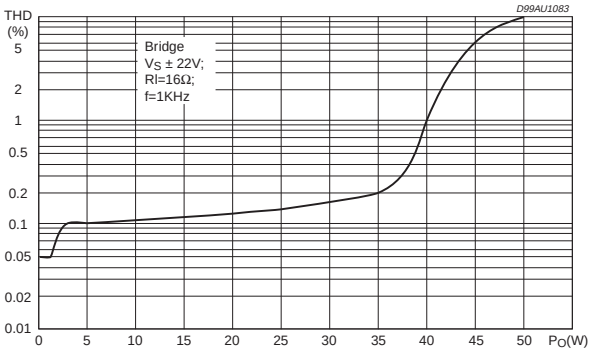

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.45	4.50	4.65	0.175	0.177	0.183
B	1.80	1.90	2.00	0.070	0.074	0.079
C		1.40			0.055	
D	0.75	0.90	1.05	0.029	0.035	0.041
E	0.37	0.39	0.42	0.014	0.015	0.016
F (1)			0.57			0.022
G	0.80	1.00	1.20	0.031	0.040	0.047
G1	23.75	24.00	24.25	0.935	0.945	0.955
H (2)	28.90	29.23	29.30	1.138	1.150	1.153
H1		17.00			0.669	
H2		12.80			0.503	
H3		0.80			0.031	
L (2)	22.07	22.47	22.87	0.869	0.884	0.904
L1	18.57	18.97	19.37	0.731	0.747	0.762
L2 (2)	15.50	15.70	15.90	0.610	0.618	0.626
L3	7.70	7.85	7.95	0.303	0.309	0.313
L4		5			0.197	
L5		3.5			0.138	
M	3.70	4.00	4.30	0.145	0.157	0.169
M1	3.60	4.00	4.40	0.142	0.157	0.173
N		2.20			0.086	
O		2			0.079	
R		1.70			0.067	
R1		0.5			0.02	
R2		0.3			0.12	
R3		1.25			0.049	
R4		0.50			0.019	
V	5° (Typ.)					
V1	3° (Typ.)					
V2	20° (Typ.)					
V3	45° (Typ.)					

(1): dam-bar protusion not included
(2): molding protusion included

OUTLINE AND MECHANICAL DATA

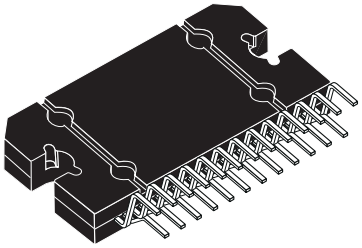

Flexiwatt25

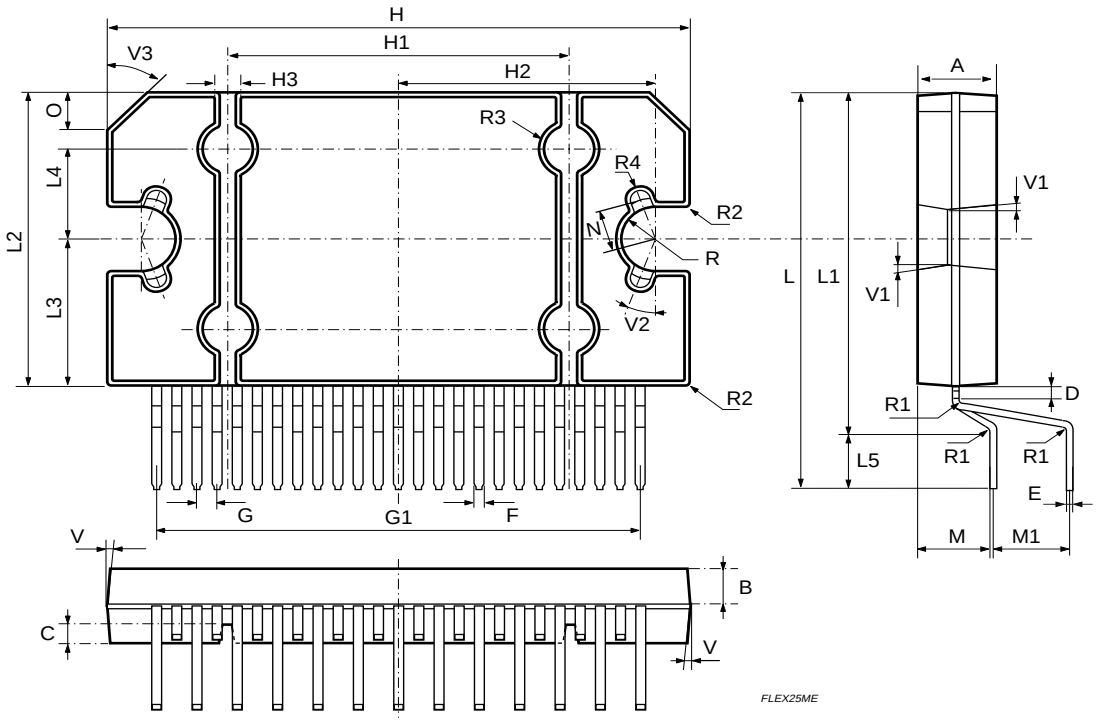

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

http://www.st.com

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.